


CLIENT  
JUTA UK LTD

PROJECT  
Cavity Drain Standard Details

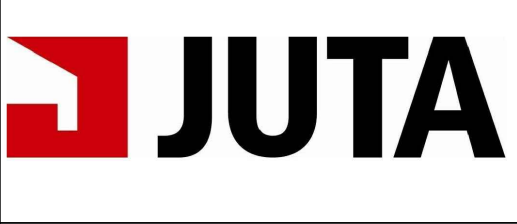


- NOTES
- Detail is generic to application so should be used as a guide not a specific installation detail.
  - JUTA Cavity Drain systems should be installed by suitably experience waterproofing contractors. Please contact JUTA for Specialist Contractors Details
  - JUTA Perimeter Channels must be maintainable and installed to include minimum 1 outlet per 50l/m of perimeter channel. A minimum of 2 outlets must be provided as a minimum
  - Cleaning ports / Jetting eyes must be provided to JUTA Perimeter Channel at every 12l/m or change in direction. For further detail see typical access port detail
  - All new concrete surfaces must be treated with anti-lime coating to prevent leaching of free lime & mineral salts.
  - All design decisions made by others that might have an impact on the gas and waterproof design performance should be brought to the attention of the design team and Juta UK Ltd. Final decisions and/or any recommendations should be approved by the design team and Juta UK Ltd.
  - Dimensions are not to be scaled from this drawing. All written measurements are to be checked on site by the contractor.
  - All rights described in chapter IV of the copyright, design and patents act 1988 have been generally asserted.

DRAWING TITLE  
JUTA CDM - SUMP PIT DETAIL

DRAWING NUMBER  
JUTA.CDM.006

|                |                  |                       |                  |
|----------------|------------------|-----------------------|------------------|
| DRAWN BY<br>PD | CHECKED BY<br>PF | SCALE<br>Not to Scale | DATE<br>Feb 2020 |
|----------------|------------------|-----------------------|------------------|



MELTON GROVE WORKS  
BLACKPOOL ROAD  
LYTHAM  
FY8 5PL  
Tel: 01772 754177